


## Special soft black PVC hose, MEDIUM duty with hard withe PVC spiral.

Suitable for suction and delivery of dirty water



Flexibility

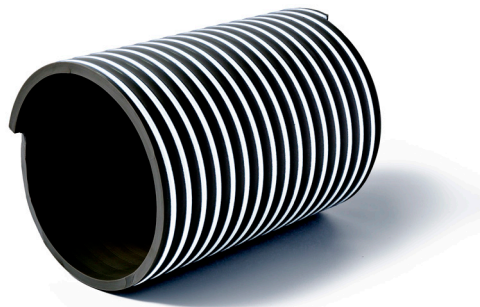

Crushing resistance



Abrasion resistance



Chemical resistance

Chemical Resistance Chart

Temperature range

-40°C +60°C



Agriculture



Industry



Home



Building



Food &  
Beverage

Part.no.	ID inch	ID mm	OD mm	Weight g/m	Bend radius mm	Work press bar	Burst press bar	Vacuum mH2O	Coil lenght mt	Pallet mt	Dimension pallet cm
587L.....		50	61,0	1050	225	3,5	10,5	9	50	300	80x120
587L0730	2"	51	62,0	1100	230	3,5	10,5	9	50	300	80x120
58L880		60	71,0	1250	270	3,0	9,0	9	50	250	110x130
587L890	2" 1/2	63	74,0	1370	285	3,0	9,0	9	50	250	110x130
587L.....		75	87,0	1700	340	3,0	9,0	9	50	250	110x130
587L0740	3"	76	88,0	1725	345	3,0	9,0	9	50	250	110x130
587L900		80	92,0	1850	360	2,5	7,5	9	30	150	110x130
587L910		90	104,0	2250	405	2,5	7,5	9	30	150	110x130
587L.....		100	114,5	2700	450	2,5	7,5	9	30	150	110x130
587L0750	4"	102	116,5	2720	460	2,5	7,5	9	30	150	110x130
587L920		110	125,0	3100	495	1,0	3,0	8	30	120	110x130
587L930		120	135,0	3600	540	1,0	3,0	8	30	120	110x130
587L940	5"	127	143,0	3900	575	1,0	3,0	8	30	90	110x130
587L950		130	146,0	4100	585	1,0	3,0	8	20	60	110x130
587L.....		150	167,5	4950	675	1,0	3,0	8	20	80	110x130
587L0760	6"	152	169,5	5000	685	1,0	3,0	8	20	60	110x130

NOTES:  
 CHEMICAL RESISTANCE CHART available on TP REFLEX web site.  
 TEMPERATURE RANGE based on qualified literature; material datasheet or product tests.  
 WORKING/BURST PRESSURE based on tests performed with water at temperature of 23±2 °C.  
 DIMENSIONS AND PERFORMANCES referred to a temperature of 23±2 °C; different temperature as well as handling, storage, aging or application conditions can lead to different values.  
 DIMENSION TOLERANCE: from 12 mm to 20 mm: ± 0.3 mm | from 22 mm to 50 mm: ± 0.5 mm | from 51 mm to 100 mm: ± 1.0 mm | from 102 mm to 150 mm: ± 1.5 mm from 152 mm to 200 mm: ± 2.0 mm other values: ±5%  
 TIGHTNESS of hose to be tested after assembly of fittings; the test should be performed in safe conditions.  
 TP REFLEX sales department is at disposal to evaluate requests concerning product application.  
 TP REFLEX has the right to modify the elements of this catalogue and declines any responsibility for unlike applications/misapplication of its products.