


## Soft grey PVC hose, MEDIUM duty with hard blu PVC spiral.

Suitable for suction and delivery of dirty water.



**Flexibility**

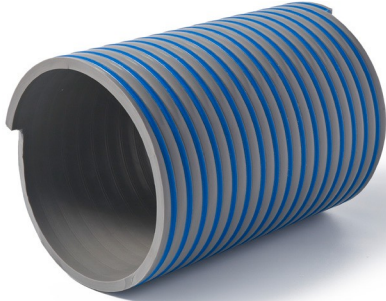

**Crushing resistance**



**Abrasion resistance**



**Chemical resistance**

Chemical Resistance Chart

**Temperature range**

-15°C +60°C



Agriculture



Industry



Home



Building



Food & beverage

Part.no.	ID inch	ID mm	OD mm	Weight g/m	Bend radius mm	Workpress bar	Burstpress bar	Vacuum mH2O	Coillenght mt	Pallet mt	Dimension pallet cm
587L0290	1 1\4"	32	41,0	600	176	5	15	8	50	1000	80x120
587L0300		35	44,0	650	193	5	15	8	50	500	80x120
587L0310	1 1\2"	38	48,0	700	209	5	15	8	50	300	80x120
587L0320		40	50,0	720	220	5	15	8	50	300	80x120
587L0330	1 3\4"	45	55,0	900	248	5	15	8	50	300	80x120
587L0340		50	61,0	1050	275	5	15	8	50	300	80x120
587L0350	2"	51	62,0	1075	281	5	15	8	50	300	80x120
587L0360		55	66,0	1150	303	4	12	8	50	300	110x130
587L0370		60	71,0	1250	330	4	12	8	50	250	110x130
587L0380	2 1\2"	63	74,0	1390	347	4	12	8	50	250	110x130
587L0390		75	87,0	1700	413	4	12	8	50	250	110x130
587L0400	3"	76	88,0	1725	418	4	12	8	50	250	110x130
587L0410		80	92,0	1850	440	4	12	8	30	180	110x130
587L0430	3 1\2"	90	104,0	2250	495	3	9	8	30	150	110x130
587L0440		100	114,0	2700	550	3	9	8	30	150	110x130
587L0450	4"	102	116,0	2720	612	3	9	8	30	150	110x130
587L0460		110	125,0	3100	660	3	9	8	30	120	110x130
587L0470		120	130,5	3600	720	2	6	8	30	120	110x130
587L0480		125	140,5	3850	750	2	6	8	30	90	110x130
587L0490	5"	127	142,5	3900	762	2	6	8	30	90	110x130
587L0500		130	145,5	4100	780	2	6	8	30	90	110x130
587L0520		150	166,5	4950	975	2	6	8	20	80	110x130
587L0530	6"	152	168,5	5000	988	2	6	8	20	60	110x130
587L0540		160	177,0	5600	1040	-	-	-	20	60	110x130
587L0550		200	218,0	10000	1300	-	-	-	10	60	110x130

NOTES:

CHEMICAL RESISTANCE CHART available on TP REFLEX web site.

TEMPERATURE RANGE based on qualified literature; material datasheet or product tests. WORKING/BURST PRESSURE based on tests performed with water at temperature of 23±2 °C.

DIMENSIONS AND PERFORMANCES referred to a temperature of 23±2 °C; different temperature as well as handling, storage, aging or application conditions can lead to different values.

TOLERANCE: from 12 mm to 20 mm: ± 0.3 mm | from 22 mm to 50 mm: ± 0.5 mm | from 51 mm to 100 mm: ± 1.0 mm | from 102 mm to 150 mm: ± 1.5 mm from 152 mm to 200 mm: ± 2.0 mm other values: ±5%

TIGHTNESS of hose to be tested after assembly of fittings; the test should be performed in safe conditions. TP REFLEX sales department is at disposal to evaluate requests concerning product application.

TP REFLEX has the right to modify the elements of this catalogue and declines any responsibility for unlike applications/misapplication of its products.