


## Green-transparent soft PVC hose with hard PVC spiral.

Suitable for agricultural applications, suction and delivery of dirty water and not aggressive liquids.



**Flexibility**

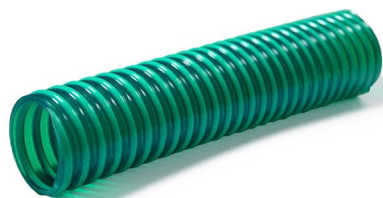

**Crushing resistance**



**Abrasion resistance**



**Chemical resistance**

Chemical Resistance Chart

**Temperature range**

-5°C +60°C



**Agriculture**



**Industry**



**Home**



**Building**



**Food & beverage**

Part.no.	ID inch	ID mm	OD mm	Weight g/m	Bend radius mm	Work press bar	Burst press bar	Vacuum mH2O	Coillenght mt	Pallet mt	Dimension pallet cm
587M0170	1\2"	13	17,0	100	60	9	18	7	50	3000	80x120
587M0180	5\8"	16	21,0	130	75	9	18	7	50	3000	80x120
587M0190	3\4"	19	24,0	180	85	9	18	7	50	2500	80x120
587M0200		20	26,0	230	90	9	18	7	50	2500	80x120
587M0210	1"	25	31,5	280	115	9	18	7	50	1200	80x120
587M0220		30	37,0	350	135	5	15	7	50	1000	80x120
587M0230	1 1\4"	32	39,0	380	145	5	15	7	50	1000	80x120
587M0240		35	42,0	425	160	5	15	7	50	500	80x120
587M0250	1 1\2"	38	45,5	470	170	5	15	7	50	300	80x120
587M0260		40	47,5	510	180	5	15	7	50	300	80x120
587M0270	1 3\4"	45	53,0	640	205	5	15	7	50	300	80x120
587M0280		50	58,5	760	225	5	15	7	50	300	80x120
587M0290		55	64,0	830	250	4	12	7	50	300	110x130
587M0300		60	69,5	900	270	4	12	7	50	250	110x130
587M0310	2 1\2"	63	72,5	1000	285	4	12	7	50	250	110x130
587M0320		70	80,0	1125	315	4	12	7	50	250	110x130
587M0330	3"	76	86,0	1275	345	4	12	7	30	180	110x130
587M0340		80	91,0	1450	360	3	9	7	30	180	110x130
587M0350	3 1\2"	90	101,5	1725	405	3	9	7	30	180	110x130
587M0360		100	112,0	2000	450	3	9	7	30	180	110x130
587M0370		110	123,0	2300	500	2	6	7	30	180	110x130
587M0380		120	133,0	2800	540	2	6	7	30	180	110x130
587M0390		125	138,0	3050	565	2	6	7	30	125	110x130
587M0400	5"	127	140,0	3150	575	2	6	7	30	125	110x130
587M0420		140	154,0	3800	630	2	6	7	30	125	110x130
587M0430		150	165,0	4300	675	2	6	7	20	100	110x130
587M0440	6"	152	167,0	4400	685	2	6	7	20	100	110x130
587M0450		160	176,0	5300	720	-	-	-	20	80	110x130
587M0460		180	197,0	5900	720	-	-	-	20	60	110x130
587M0470		200	218,0	6500	900	-	-	-	20	60	110x130

### NOTES:

CHEMICAL RESISTANCE CHART available on TP REFLEX web site.

TEMPERATURE RANGE based on qualified literature; material datasheet or product tests. WORKING/BURST PRESSURE based on tests performed with water at temperature of 23±2 °C.

DIMENSIONS AND PERFORMANCES referred to a temperature of 23±2 °C; different temperature as well as handling, storage, aging or application conditions can lead to different values.

TOLERANCE: from 12 mm to 20 mm: ± 0.3 mm | from 22 mm to 50 mm: ± 0.5 mm | from 51 mm to 100 mm: ± 1.0 mm | from 102 mm to 150 mm: ± 1.5 mm from 152 mm to 200 mm: ± 2.0 mm other values: ±5%

TIGHTNESS of hose to be tested after assembly of fittings; the test should be performed in safe conditions. TP REFLEX sales department is at disposal to evaluate requests concerning product application.

TP REFLEX has the right to modify the elements of this catalogue and declines any responsibility for unlike applications/misapplication of its products.